


Gray Opaque Linear Low Density Polyethylene (GRY)

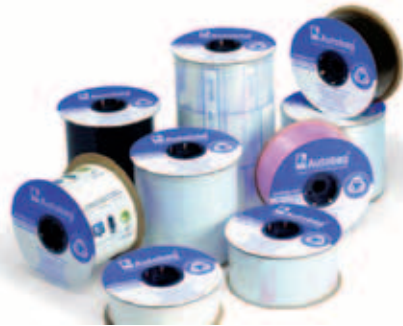

GRY material is designed to provide cost-effective privacy and protection from light and particulates. Its opacity and strength make this material suitable for many applications. GRY has excellent printing characteristics and processes well both in converting and loader applications.

Genuine Autobag® bags-on-a-roll and SidePouch™ bags-in-a-box are system-matched and guaranteed to run on all Automated Packaging Systems bagging equipment.

MIL

GRY

User Benefits

- Versatility
- Strength
- Easily Processed

Typical Applications

- Medical
- Hardware
- Any application where opacity and strength are required

Technical Specifications

Compliances:	N/A
Press Printing:	Yes
Imprinting:	Yes
Trim Seal:	Yes
Mil Thickness:	1.32, 1.54, 2.0, 2.8
Configuration:	Autobag; and SidePouch with restrictions

Performance Data:	U/M	1.5/ LD	2.0/ SD	3.0/ ET	4.0/ ST	ASTM
Haze	%	50	Opaque	Opaque	Opaque	D-1003
Puncture Resistance (Dart)	grams	101	191	277	365	D-1709
Tensile Strength MD	psi	3880	3749	3614	3360	D-882A
Tensile Strength TD	psi	1410	3679	3358	3037	D-882A
Elongation MD	%	260	356	439	490	D-882A
Elongation TD	%	640	657	647	740	D-882A
Elmendorf Tear MD	grams	237	192	330	365	D-1922
Elmendorf Tear TD	grams	285	272	414	771	D-1922
OTR	cc/100in ² /day	346	292	240	126.4	D-3985
MVTR	g/100in ² /day	1.18	0.6	0.4	0.4	F-1249



Above chart reflects nominal test values. Actual results may fluctuate due to inherent process variation. Test data and mil thickness reflect MLT1 & 2 materials only. Certain minimum purchase volumes may apply.

Automated Packaging Systems Ltd.
 Enigma Business Park
 Sandy's Road, Malvern
 Worcestershire WR14 1JJ
 Tel: +44 (0) 1684 891 400
 Fax: +44 (0) 1684 891 401
 E-mail: contact@autobag.co.uk

machines

materials

service

s y s t e m s a d v a n t a g e