



The Autobag® AB 180 OneStep™ – Flexible bagging system for fulfillment and short - run packaging applications.

The Autobag AB 180 OneStep provides flexible solutions for dynamic packaging environments, such as mail order fulfillment, short production run, and build-on-demand operations. By positioning the PI 412c imprinter directly over the next bag to be loaded, the AB 180 OneStep prints and indexes in a single-step – virtually eliminating bag waste and product queuing.

This next-bag-out technology ensures accuracy and efficiency in packaging applications that require frequent product and label changeovers. The AB 180 OneStep can be utilised in the standard Print-n-Pack™ configuration, or integrated with a variety of productivity options, including laptop computers, bar code scanners and stand-alone keyboards.

The AutoTouch™ Control Screen of the AB 180 OneStep provides easy access to job set-up and storage for rapid job recall. Plus, the system can be integrated with ERP and shipping software for 1:1 mail order and fulfillment applications, linking shipping and customer databases for an efficient print, pack and ship operation.

The AB 180 OneStep operates at speeds up to 30 bags per minute, printing high-resolution text, graphics and bar codes at speeds up to 30 cm per second. The system is ideal for packaging small to medium products, offering bag sizes up to 279mm wide and 632mm long. On-board diagnostics and modular Replace-n-Repair™ components ensure machine maximum uptime.

Using genuine Autobag brand bags-on-a-roll or bags-in-a-box, the AB 180 OneStep is a fast, flexible and cost-effective packaging solution.

User Benefits

- Improves the productivity of the packaging operation
- Prints the next bag out, no product to queue and significantly reduces waste
- Compatible with multiple materials for broad application requirements
- Prints high-resolution text, graphics and bar codes directly on to the bag, eliminating the need for a separate labeling operation
- Operator-friendly AutoTouch™ Control Screen for quick and easy job storage and recall
- Can be integrated with shipping and customer databases for 1:1 fulfillment packing and shipping
- Automates the label formatting process
- Tilt-back printer head for easy maintenance
- On-board diagnostics and modular components ensure maximum machine uptime
- Change bag sizes easily in less than 2 minutes



BPM

20

30

40

50

60

70

80



PART NO. 35



AutoTouch

Control Screen

Provides fast and easy access to job storage and recall, system diagnostics, and productivity data



Modular Valve Pack

A pneumatic control system designed for productivity, reliability and fast addition or replacement of individual valves



Simple Count Funnel

Accumulating funnel option speeds productivity for hand load operations by automatically cycling bagger when a pre-set count is reached

Standard Features

- AutoTouch™ Control Screen accesses operator tutorials, help system, on-board diagnostics, data retrieval, and performance monitoring
- On-board memory and PI 412c remote keypad to store job data for recall at a later time
- Easily accessible 'swap-out' control parts for easy problem solving
- Powered unwind system provides accurate positioning for inline printing and loading
- Simple mechanical height adjustment and casters for operator comfort and portability
- Product Load Shelf to support heavier products
- Standard Footswitch to cycle bagger

Typical Applications

- Mail order fulfilment
- Catalogue order fulfilment
- Spare parts distribution
- Short-run production with frequent changeovers in any market



Options

- Handheld or tabletop bar code scanner
- Stand-alone keyboard
- PI 412c Universal Printer Interface
- Dual optical palm switches
- Range of infeed funnels
- Custom conveying equipment
- Seal flatteners
- Spare parts kits
- Custom Engineering & Integration design and support



Configuration Options

A variety of configuration options are available to improve productivity for each unique application

Technical Specifications

Weight: 142 kg
Electrical: 110/220 VAC; 50-60 Hz
Air Feed: 5 CFM/80 psi of clean, dry air
Approvals: CE
Dimensions:

Pass-Through: up to 11.4cm
Bag Thickness: 35 to 100 micron
Bag Sizes: W 50mm to 279mm L 140mm to 635mm*
 *With 25mm seal point




Mechanical Features

PI 412c printer head is positioned directly over the bag to be loaded, eliminating product queues and separate labeling operations.



Tilt-back printer enables fast and easy maintenance and is system-matched for highest quality using genuine AutoLabel™ Thermal Transfer Ribbon.

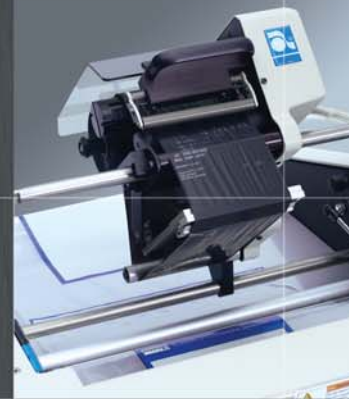

Powered Unwind provides web alignment and tension control for consistent film delivery to product load station.



Automated Packaging Systems Ltd.
 Enigma Business Park
 Sandy's Road, Malvern
 Worcestershire WR14 1JJ
 Tel: +44 (0) 1684 891 400
 Fax: +44 (0) 1684 891 401
 E-mail: contact@autobag.co.uk